


## 0 INJECTION SOLUTION

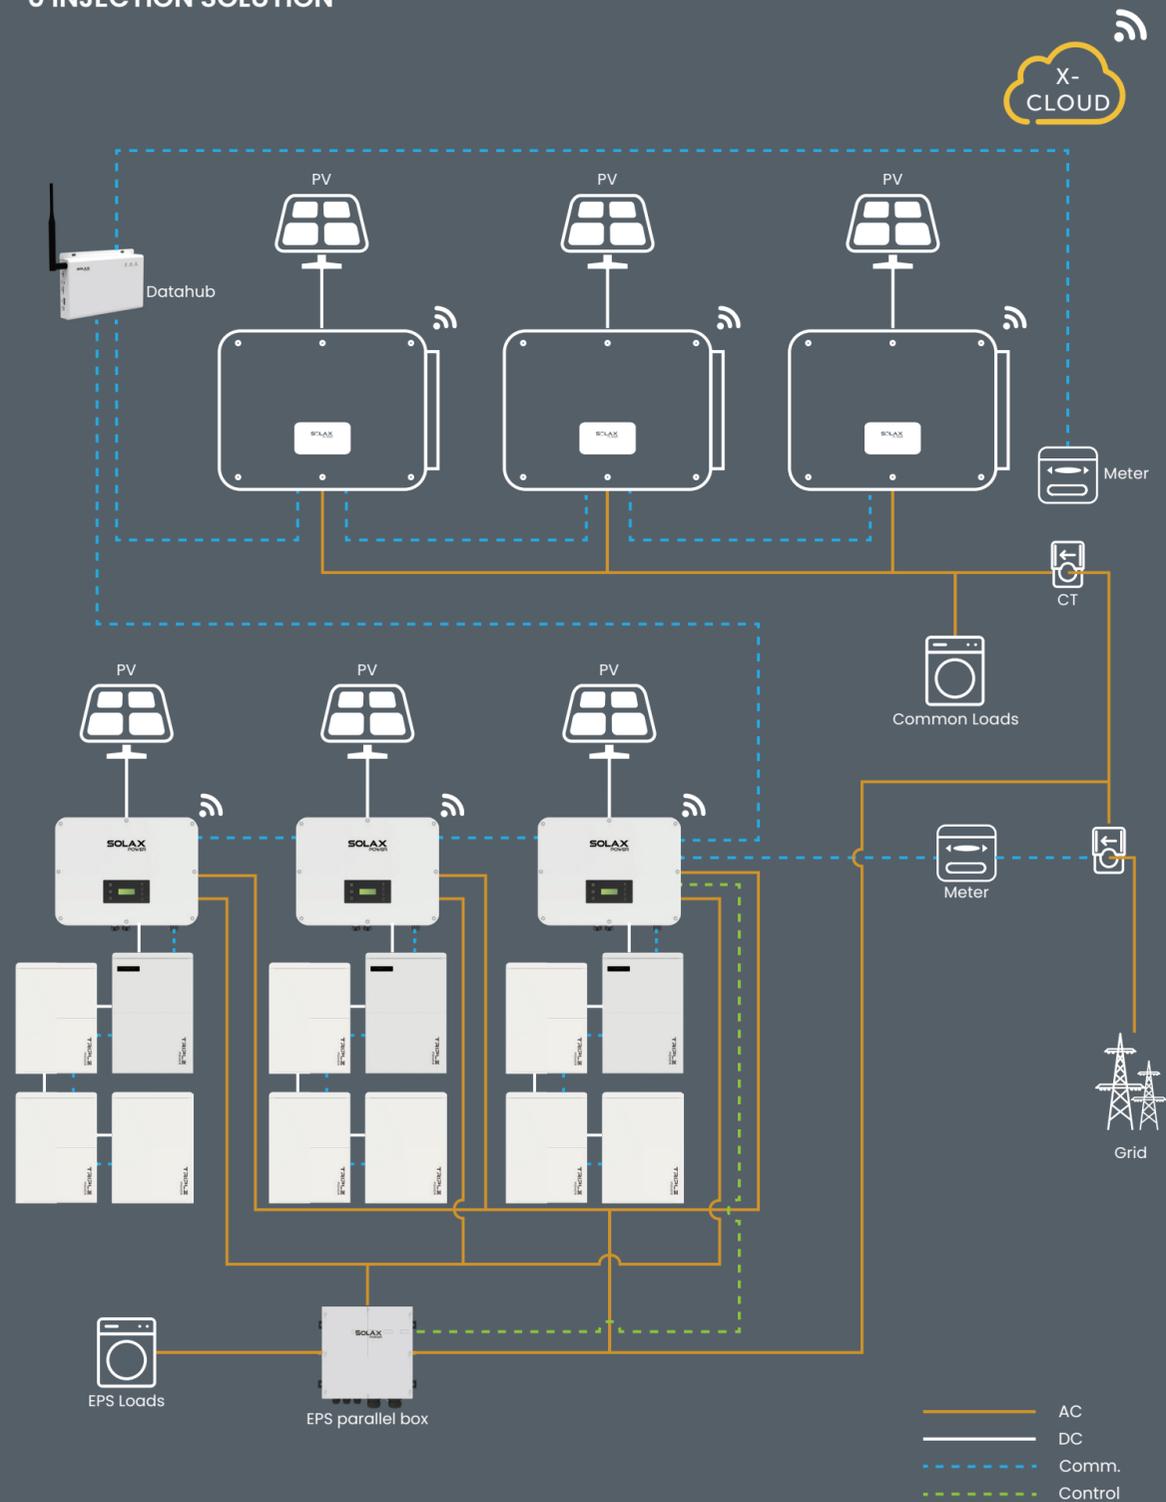

Global: +86 571-56260011 PL: +48 662 430 292 AU: +61 1300 476 529 DE: +49 (0) 6142 4091 664 UK: +44 2476 586998 NED: +31 (0) 8527 37932 info@solaxpower.com service@solaxpower.com

POWERING A GREEN FUTURE

[www.solaxpower.com](http://www.solaxpower.com)

# SOLAX X3-ULTRA



## Features

### Economic

- Maximum 200% oversize and 200% PV input power
- Maximum 36A input current per MPPT, support high power solar panel

### Intelligent

- AI ready, forecasting solar generation and home consumption, smart energy management strategy
- VPP ready, Solax cloud supports resource aggregator (2030.5, OpenADR)
- Support smart scene function, intelligent loads management (e.g., Heat pump, EV charger)
- Micro-grid ready, supporting a variety of scenarios, both on-grid and off-grid, balancing power between PCS and Hybrid in real time
- Support 7×24h scheduling mode
- Support Wireless meter solution
- Dual independent battery ports are ready to expand battery capacity free

### Robust

- Robust back-up ability, switch over time <10ms, up to 200% EPS output for 10s, support half-wave loads
- Stronger, EPS operation without battery

### Safe

- IP66 protection level
- AC&DC SPD type II, always guarding the inverter
- AFCI optional



## X3-ULTRA (THREE PHASE)

	X3-ULT-15KP	X3-ULT-15K	X3-ULT-19.9K	X3-ULT-20K	X3-ULT-25K	X3-ULT-30K
<b>INPUT PV</b>						
Max.recommended PV array power [Wp]	30000	30000	40000	40000	50000	60000
Max.input DC power [W]	30000	30000	40000	40000	50000	60000
Max.DC voltage [V]	1000					
Nominal DC operating voltage [V]	600					
No. of MPP trackers / Strings per MPP tracker	3(2/2/2)	2(2/2)	2(2/2)	2(2/2)	3(2/2/2)	3(2/2/2)
Max. input current (input PV1 / input PV2 / input PV3) [A] <sup>①</sup>	PV1: 36 / PV2: 36 / PV3: 36	PV1: 36 / PV2: 36	PV1: 36 / PV2: 36	PV1: 36 / PV2: 36	PV1: 36 / PV2: 36 / PV3: 36	PV1: 36 / PV2: 36 / PV3: 36
Max short circuit current (input.PV1 / input.PV2 / input.PV3) [A]	PV1: 45 / PV2: 45 / PV3: 45	PV1: 45 / PV2: 45	PV1: 45 / PV2: 45	PV1: 45 / PV2: 45	PV1: 45 / PV2: 45 / PV3: 45	PV1: 45 / PV2: 45 / PV3: 45
MPPT voltage range [V]	160 - 950					
Start output voltage [V]	200					
<b>OUTPUT AC(On-Grid)</b>						
Nominal AC power [VA]	15000 (AS 4777 14999)	15000 (AS 4777 14999)	19999	20000	25000	30000 (AS 4777 29999)
Max. apparent AC power [VA]	16500 (AS 4777 14999)	16500 (AS 4777 14999)	19999	22000	27500	30000 (AS 4777 29999)
Rated grid voltage (AC voltage range) [V]	3P4W, 400 / 230					
Rated grid frequency [Hz]	50 / 60					
Nominal AC current [A]	21.8	21.8	29.0	29.0	36.3	43.5
Max. AC current [A]	24.0	24.0	29.0	31.9	39.9	43.5
Displacement power factor	1 (- 0.8 ~ 0.8)					
Total harmonic distortion (THDi, rated power) [%]	< 3					
<b>INPUT AC</b>						
Nominal AC power [VA]	15000	15000	19999	20000	25000	30000
Nominal AC current [A]	21.8	21.8	29.0	29.0	36.3	43.5
Rated grid voltage (AC voltage range) [V]	3P4W, 400 / 230					
Rated grid frequency [Hz]	50 / 60					
<b>BATTERY</b>						
Battery type	Lithium - ion					
Battery voltage range [V]	180 - 800					
Max. charge / Discharge current [A]	60 (30 x 2)					
<b>EPS OUTPUT(WITH BATTERY)</b>						
EPS peak power [VA]	2 time of rated power, 10s					
EPS rated power [VA]	15000	15000	19999	20000	25000	30000
EPS rated voltage [V], Frequency [Hz]	400 / 230; 50 / 60					
EPS rated current [A]	21.8	21.8	29.0	29.0	36.3	43.5
Switchover time [ms]	< 10					
Total harmonic distortion (THDv, linear Load) [%]	< 3					
<b>POWER CONSUMPTION</b>						
Internal consumption (night) [W]	< 5					
<b>PROTECTION</b>						
Anti-Islanding protection	Yes					
DC reverse polarity protection	Yes					
Insulation monitoring	Yes					
Residual current monitoring	Yes					
AC overcurrent protection	Yes					
AC short-circuit protection	Yes					
AC overvoltage protection	Yes					
Over-heat protection	Yes					
Battery reverse charging from grid	Yes					
Surge protection	Type II, DC and AC					
AFCI	OPT					




## X3-ULTRA (THREE PHASE)


	X3-ULT-15KP	X3-ULT-15K	X3-ULT-19.9K	X3-ULT-20K	X3-ULT-25K	X3-ULT-30K
<b>EFFICIENCY</b>						
MPPT efficiency	99.9%					
Max. efficiency	98.0%					
European efficiency	97.7%					
Rated Battery charge efficiency	98.5%					
Rated Battery discharge efficiency	97.0%					
<b>STANDARD</b>						
Safety	EN / IEC62109 - 1 / - 2					
EMC	EN61000 - 6 - 1 / 2 / 3 / 4; EN61000 - 3 - 11 / 12; EN 5011; IEC 62920					
Certification	VDE4105 / G99 / AS4777 / EN50549 / CEI 0 - 21 / IEC61727 / PEA / MEA / NRS - 097 - 2 - 1 / RD1699 / TOR					
<b>GENERAL DATA</b>						
Protection class	IP66					
Operating temperature range [°C]	- 35 ~ 60 (Derating above + 45)					
Relative humidity [%]	0 ~ 100					
Altitude [m]	< 3000					
Storage temperature [°C]	- 40 ~ +70					
Dimensions (WxHxD) [mm]	696 x 526 x 240					
Weight [kg]	47					
Cooling concept	Smart cooling					
Topology	Transformerless					
Communication	Modbus ( RS485 ), Meter ( RS485 ), DI x 5, DO x 2					

①: Input PV3 only available for 15KP, 25K and 30K.

## WHOLE HOME BACKUP SOLUTION

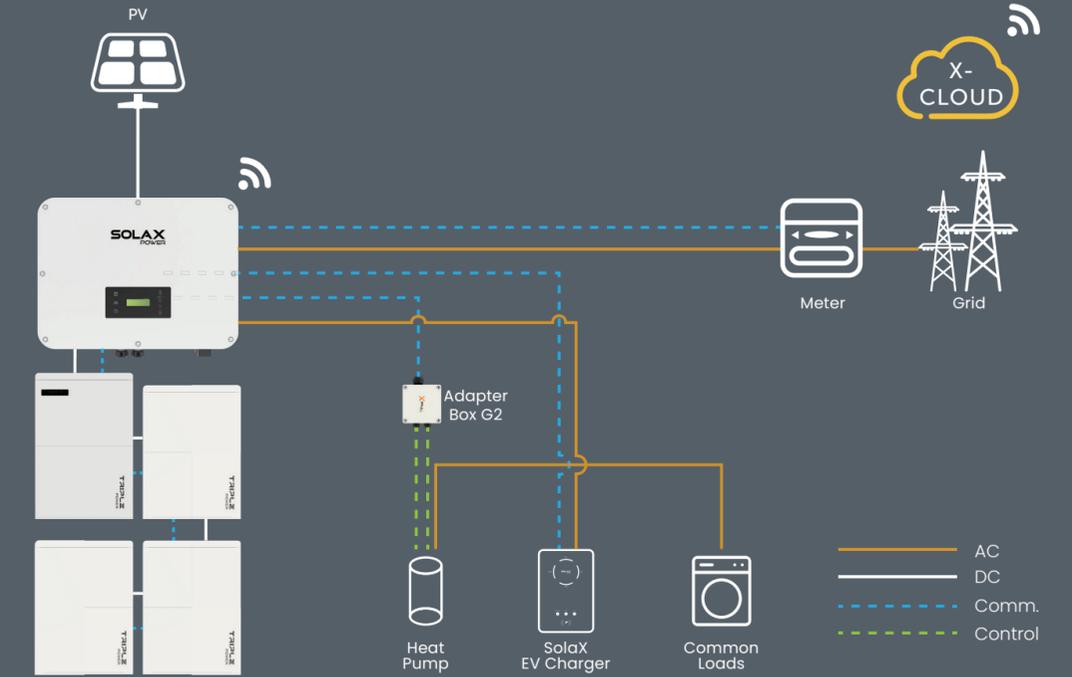

## PARALLEL & GENERATOR INTEGRATED SOLUTION

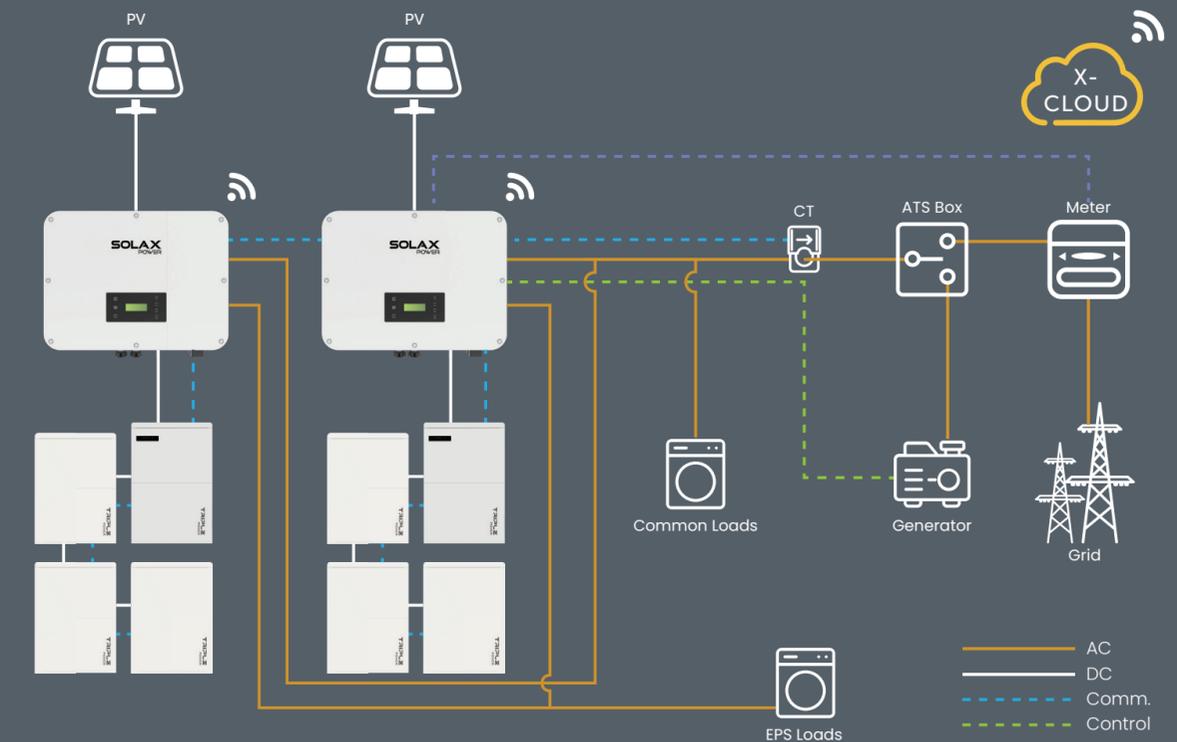

## TYPICAL SCENARIO PARTIAL SOLUTION

